


CS & CAB



THE RIGHT CONNECTION FOR YOUR PHOTOELECTRIC SENSORS FOR INDUSTRIAL ENVIRONMENT 24VDC OR 10-30VDC POWER SUPPLY

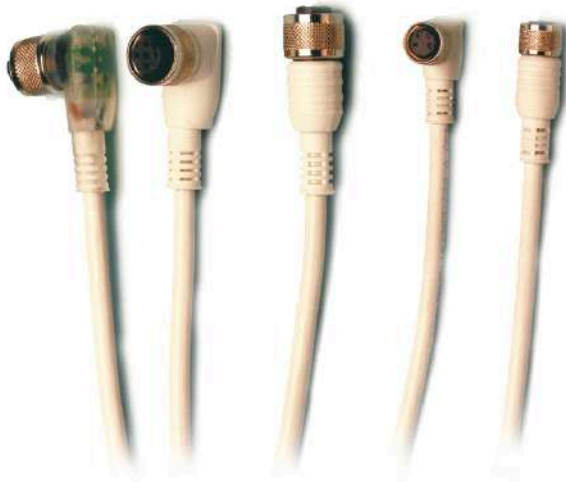

- M8 and M12, axial or radial female connectors
- Standard length cables: 2, 3, 5, 7, 10, 15, 25 or 50m
- 3, 4, 5, 8 or 12 poles
- Shielded or unshielded models
- P.U.R. coated models for use in harsh environments
- P.V.C. coated models for standard use
- Standard M12 4 pole non-cabled connectors
- The cable jacket maybe marked 300V only as insulation voltage between wires, the operational voltage is 24Vdc or 10-30Vdc, less than 80 V required by CCC-China

Proprietà di rilevamento

Distanza di rilevazione nominale	n/a
Regolazione di sensibilità	n/a

Applicazione

Descrizione	Straight female
Funzioni	Cable/connector

Uscite

Tipo di uscita	n/a
Tempo di risposta	n/a

Dati elettrici

Tensione di alimentazione	10-30 VDC
Emissione	n/a

Dati meccanici

Dimensioni	L=5m
Conessioni	M8 4-poles
Materiale	PVC (Grey)

Dati generali

Dimensions	L=5m
------------	------

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

Data di stampa

14/03/2024 09:28:12