

958010502

S3N





MINIATURE PHOTOELECTRIC SENSOR

- All models with visible and bright red emission
- LED and Laser emission models
- Multiple Background suppression functions
- Shiny and clear object detection
- Single, Double trimmer & Push Button models
- Diffuse proximity up to 100 cm
- Background suppression up to 800 mm (LED trimmer version)
- Polarized RRX 7 m (Red LED emission)
- Polarized RRX 12 m (Red Laser emission)
- Through-beam 20 m and Laser 30 m
- Connection with 2 m Cable or M8 connector
- Rugged IP67 Plastic miniature case
- M3 threaded holes on the front side with metal inserts
- State of the art IO-Link connectivity with extended Smart Tasks



Detection properties

Nominal sensing distance

600mm

Sensitivity adjustment

1 turn trimmer

Minimum sensing distance (blind zone)

0mm

Application

Function Principle	Background suppression
Notes	(class 1 LASER) white target Kodak 90% 100 x 100mm
Optic position	Radial 90°
Functions	Background suppression

Outputs

Output type	PNP L/D selectable by trimmer L/D Selectable
Output Function	L/D Selectable
Switching frequency	1,5kHz
Response time	333µs

Electrical data

Operating Voltage	10...30VDC
No-Load supply current	≤ 35mA
Load current	≤100mA
Leakage current	≤ 300 µA
Output voltage drop	≤2V@Iload=100mA
Max ripple content	≤10%
LED indicators	yellow OUTPUT LED, green POWER ON LED
Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	LASER Red (650nm) class1
Interference to external light	according to EN 60947-5-2 : 2020
Impulsive Overvoltage Protection	Yes
Insulation resistance	>20 MΩ 500 Vdc, between electronics and housing
Contact resistance	500 Vac 1 min., between electronics and housing
0,1µF @Vmax - 1µF @Vmin	Yes

Mechanical data


Housing Material	Plastic Polymer Fiber Glass reinforced
Connections	M8 plug 4pin
Active Head Material	PMMA
Storage temperature	- 25°C...+70°C
Plug connector material	Metal
shaft material	POM, PMMA
Diameter/Dimension	Cubic

Test/Approvals

Approvals	CE cULus CDRH 1
EMC compatibility	EN 60947-5-2
Shocks and vibrations	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)


Generical Data

Dimensions	11x31x19 mm
Operating Temperature	-25°C ... 55°C
Mechanical Protection	IP67

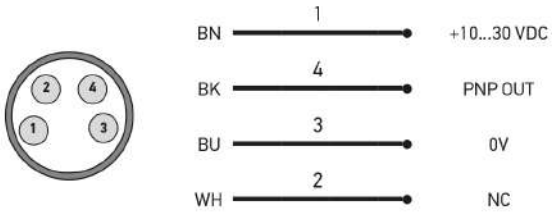


RESPONSE CURVES


B06-W90 AND G18-W90 SHIFT

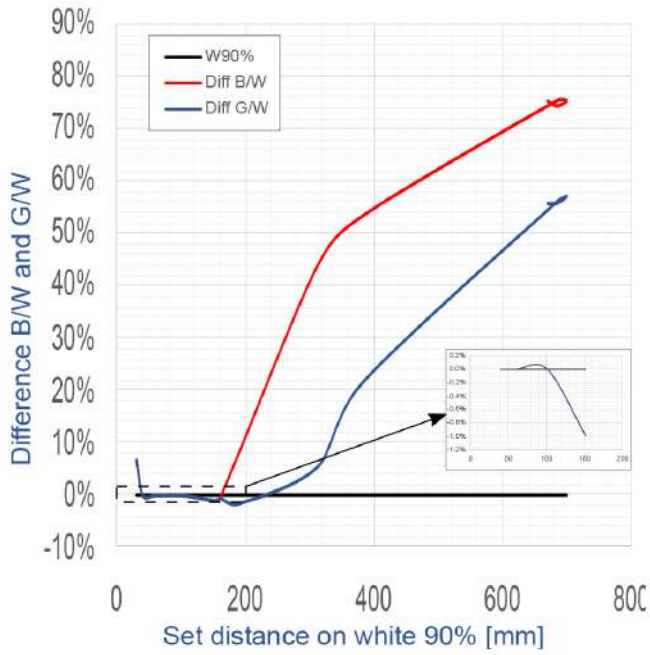


Blind zone

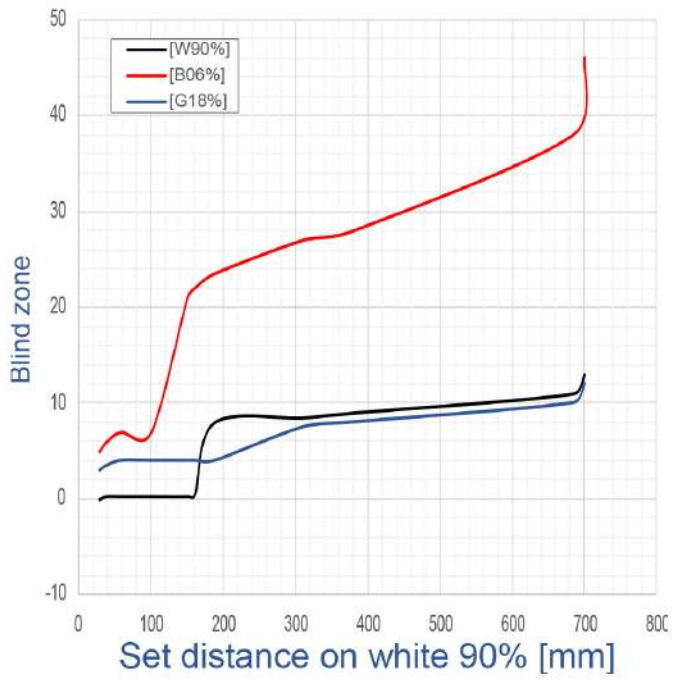



Hysteresis

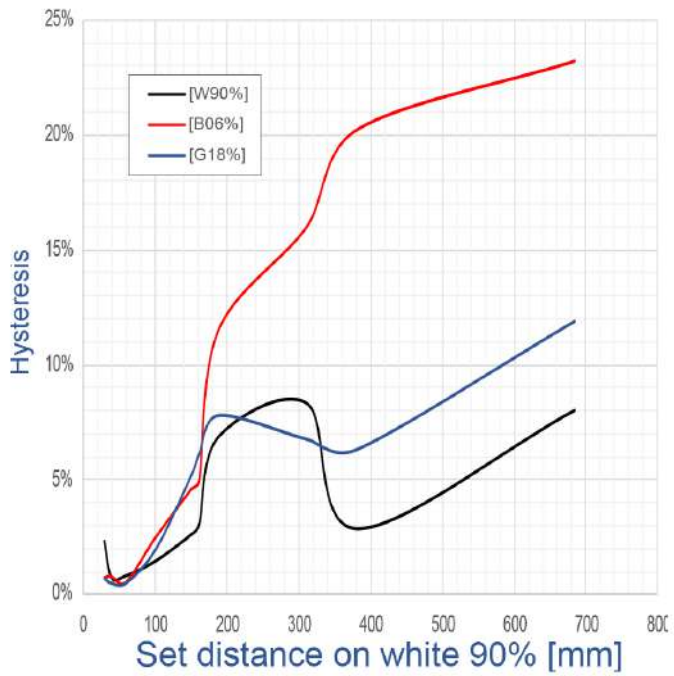


Hysteresis VS sensing distance

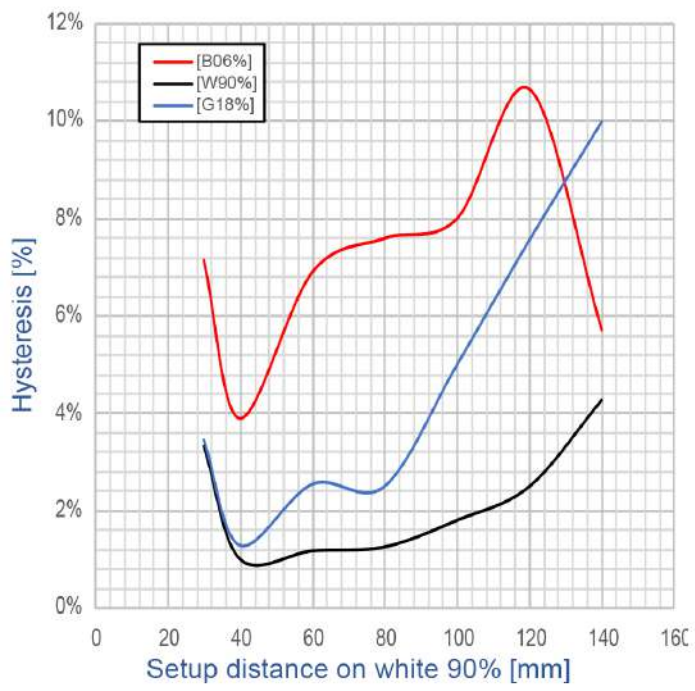


Operating distance




Operating distance

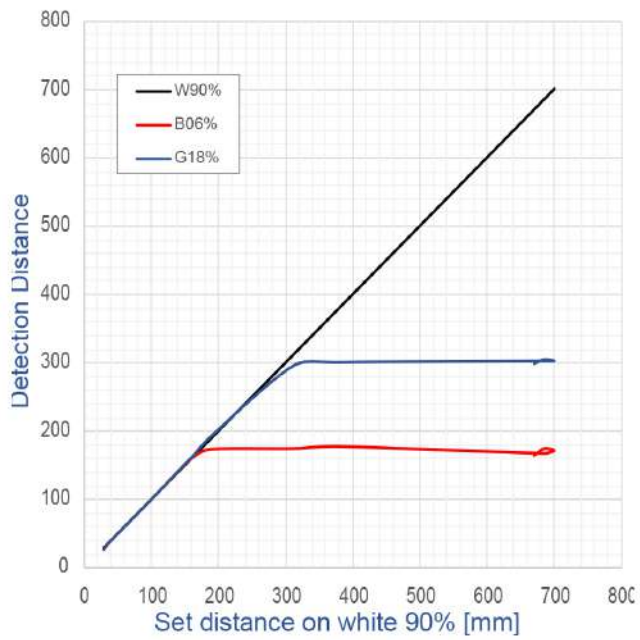

Sensing distance VS taught position

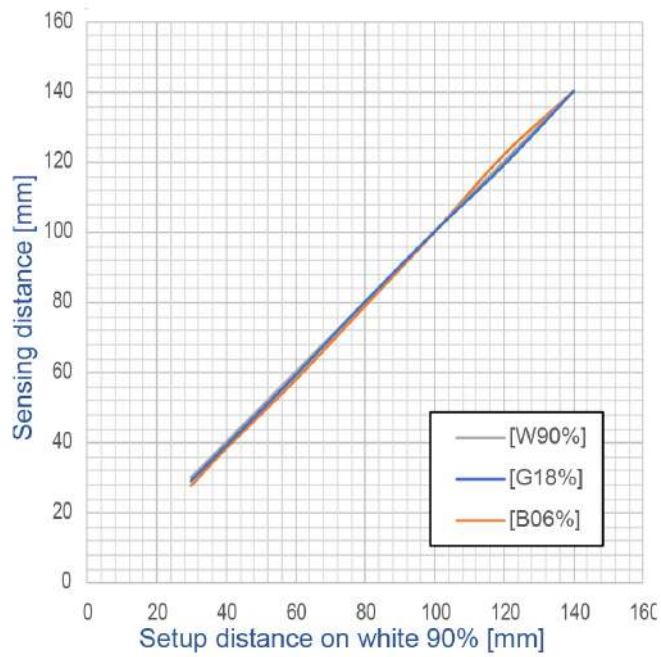

Sensing range displacement

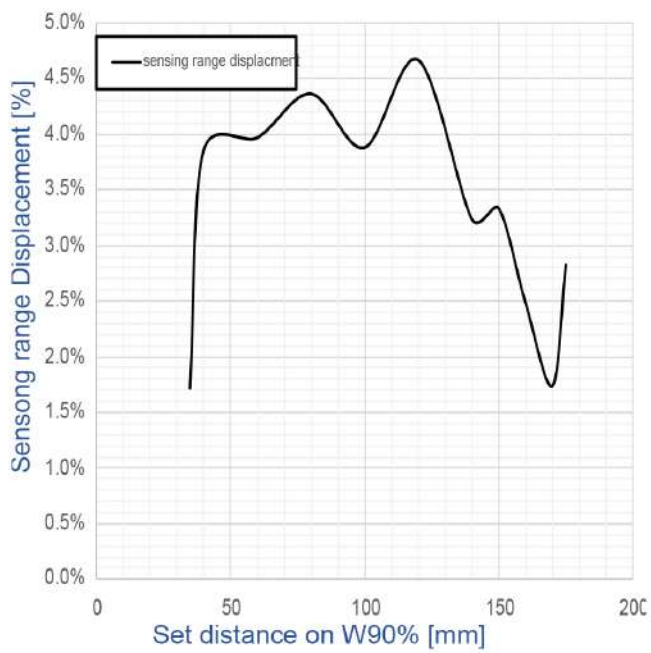

Datasensing S.r.l.

Strada S.Caterina, 235

41122 Modena (MO)

Tel. 059 420411

Fax 059 253973

E-mail info@datasensing.com

date of printing

17/07/2023 10:59:21